




STAND ALONE CERVICAL SPINE TRUSS SYSTEM™

INTERBODY FUSION DEVICE

CSTS-SA has an Advanced Structural Design that incorporates 4WEB Medical's proprietary Truss Implant Technology™. Under normal loading conditions the struts in the truss implant transfer strain to adjacent cellular material which stimulates a mechanobiologic response.

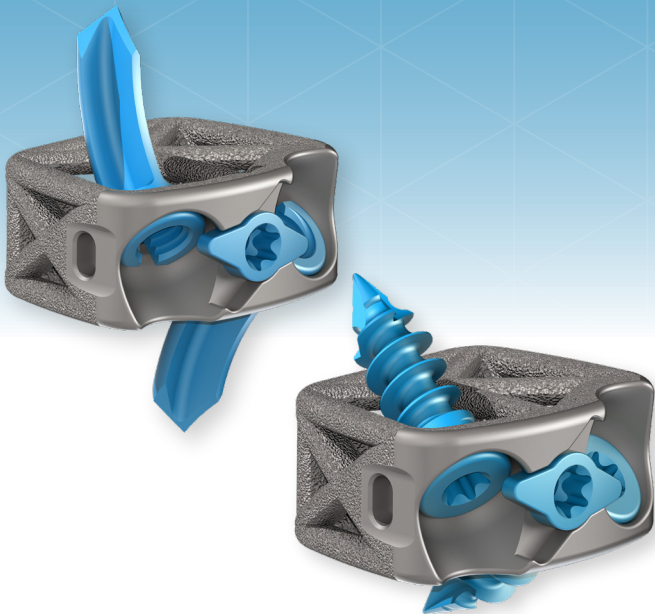

- ▲ Novel Truss Implant Technology™ provides a Snow Shoe Interface that distributes load across the endplate minimizing point loading and reducing the risk of subsidence.*
- ▲ Hierarchical surface roughness spans from the macro to nano scale. These surface features have been shown to stimulate increased gene expression of certain osteogenic markers when compared to other interbody surfaces and materials.¹
- ▲ Open architecture design allows for greater graft volume and bone growth throughout the entire construct.*




Zero-profile
stand alone
construct

Intuitive instrumentation
available for guided and
freehand surgical techniques

Single-step
locking
mechanism


Sterile packed for
hospital efficiency

Screw and anchor
fixation options

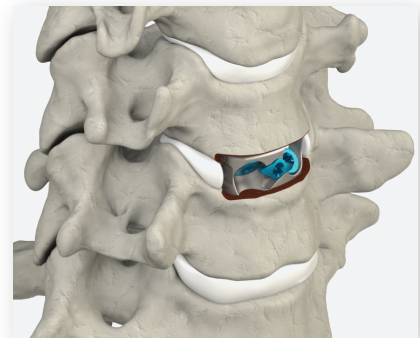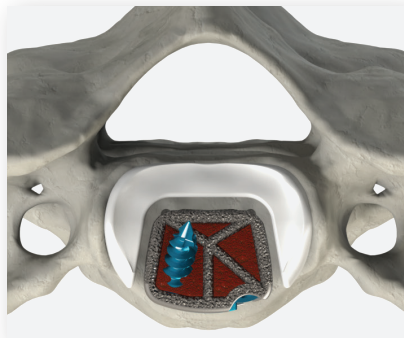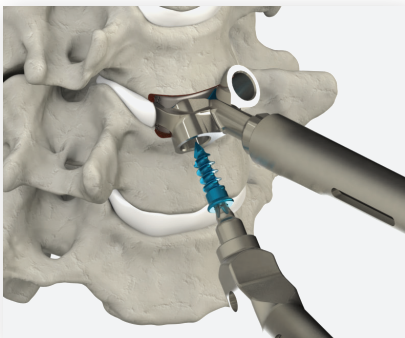

¹ Rowe et al, SMISS, AnnualForum'19, p.52


*Data on File

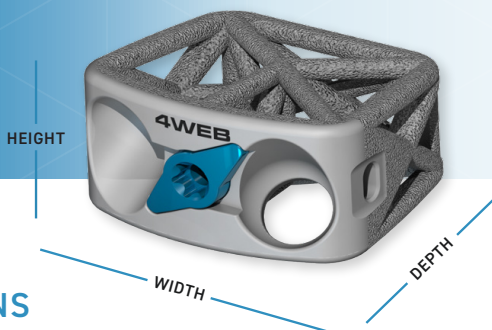

CSTS-SA IMPLANT SPECIFICATIONS

PRODUCT CATALOG

CATALOG #	FOOTPRINT (D, W, H)	LORDOSIS
0 DEGREE		
CSTS-SA-SM0005-SP	12 x 15 x 5mm	0°
CSTS-SA-SM0006-SP	12 x 15 x 6mm	0°
CSTS-SA-SM0007-SP	12 x 15 x 7mm	0°
CSTS-SA-SM0008-SP	12 x 15 x 8mm	0°
CSTS-SA-SM0009-SP	12 x 15 x 9mm	0°
CSTS-SA-SM0010-SP	12 x 15 x 10mm	0°
* CSTS-SA-SM0011-SP	12 x 15 x 11mm	0°
* CSTS-SA-SM0012-SP	12 x 15 x 12mm	0°
CSTS-SA-MD0005-SP	14 x 17 x 5mm	0°
CSTS-SA-MD0006-SP	14 x 17 x 6mm	0°
CSTS-SA-MD0007-SP	14 x 17 x 7mm	0°
CSTS-SA-MD0008-SP	14 x 17 x 8mm	0°
CSTS-SA-MD0009-SP	14 x 17 x 9mm	0°
CSTS-SA-MD0010-SP	14 x 17 x 10mm	0°
* CSTS-SA-MD0011-SP	14 x 17 x 11mm	0°
* CSTS-SA-MD0012-SP	14 x 17 x 12mm	0°
7 DEGREE		
CSTS-SA-SM0705-SP	12 x 15 x 5mm	7°
CSTS-SA-SM0706-SP	12 x 15 x 6mm	7°
CSTS-SA-SM0707-SP	12 x 15 x 7mm	7°
CSTS-SA-SM0708-SP	12 x 15 x 8mm	7°
CSTS-SA-SM0709-SP	12 x 15 x 9mm	7°
CSTS-SA-SM0710-SP	12 x 15 x 10mm	7°
* CSTS-SA-SM0711-SP	12 x 15 x 11mm	7°
* CSTS-SA-SM0712-SP	12 x 15 x 12mm	7°
CSTS-SA-MD0705-SP	14 x 17 x 5mm	7°
CSTS-SA-MD0706-SP	14 x 17 x 6mm	7°
CSTS-SA-MD0707-SP	14 x 17 x 7mm	7°
CSTS-SA-MD0708-SP	14 x 17 x 8mm	7°
CSTS-SA-MD0709-SP	14 x 17 x 9mm	7°
CSTS-SA-MD0710-SP	14 x 17 x 10mm	7°
* CSTS-SA-MD0711-SP	14 x 17 x 11mm	7°
* CSTS-SA-MD0712-SP	14 x 17 x 12mm	7°

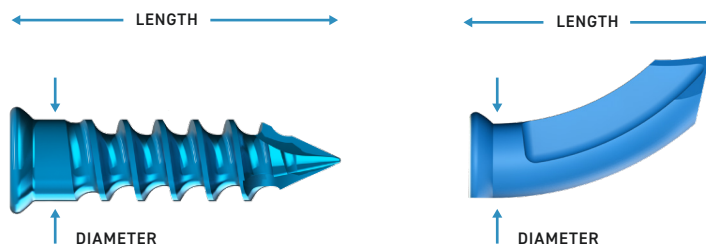

SELF-DRILLING SCREW SPECIFICATIONS

SCREW DIAMETER	LENGTH	
3.5mm	12, 14, 16mm	PRIMARY SCREW
3.8mm	12, 14, 16mm	RESCUE SCREW
CATALOG #	DIAMETER, LENGTH	
CSCR-3512-SD-SP	Ø3.5mm, L 12mm	
CSCR-3514-SD-SP	Ø3.5mm, L 14mm	
CSCR-3516-SD-SP	Ø3.5mm, L 16mm	
CSCR-3812-SD-SP	Ø3.8mm, L 12mm	
CSCR-3814-SD-SP	Ø3.8mm, L 14mm	
CSCR-3816-SD-SP	Ø3.8mm, L 16mm	

FIXATION ANCHOR SPECIFICATIONS

ANCHOR DIAMETER	LENGTH	
3.5mm	11, 12mm	PRIMARY ANCHOR
CATALOG #	DIAMETER, LENGTH	FITS WITH INTERBODY
CSTS-SA-ACSM05-SP	Ø3.5mm, L 11mm	Small, 5mm
CSTS-SA-ACSM06-SP	Ø3.5mm, L 11mm	Small, 6mm
CSTS-SA-ACSM07-SP	Ø3.5mm, L 11mm	Small, 7mm
CSTS-SA-ACSM08-SP	Ø3.5mm, L 11mm	Small, 8mm
CSTS-SA-ACSM09-SP	Ø3.5mm, L 11mm	Small, 9mm
CSTS-SA-ACSM10-SP	Ø3.5mm, L 11mm	Small, 10mm
CSTS-SA-ACMD05-SP	Ø3.5mm, L 12mm	Medium, 5mm
CSTS-SA-ACMD06-SP	Ø3.5mm, L 12mm	Medium, 6mm
CSTS-SA-ACMD07-SP	Ø3.5mm, L 12mm	Medium, 7mm
CSTS-SA-ACMD08-SP	Ø3.5mm, L 12mm	Medium, 8mm
CSTS-SA-ACMD09-SP	Ø3.5mm, L 12mm	Medium, 9mm
CSTS-SA-ACMD10-SP	Ø3.5mm, L 12mm	Medium, 10mm

*By Request Only